



LED PATH LIGHTS PL-01-LEDP SERIES



TYPE

SPECIFICATIONS

CONSTRUCTION: Cast aluminum or cast brass China Hat; matching extruded aluminum or brass stanchion

LIGHT SOURCE: 12v, 4w, 300 lumen integrated round LED flat panel, warm white 3000K; optional cool white 5200K 320 lumen available (modify part number to LEDP52)

LIFETIME RATING: 50,000 Hours

12v EXTERNAL DRIVER: 4w 350mA output, 12v AC input. Voltage range of 9 to 18 volts with optimum operating range of 10 to 15 volts for consistent performance and brightness. For use with magnetic transformers only.

SOCKET: None- LED is hard wired inside fixture

LENS: Clear acrylic (standard) Optional sand blast (-SB) or White (-WHT) available

WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v only)

For 25 foot 16/2 fixture lead wire add -25F to catalog number.


120v standard wiring

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v only


MOUNTING: FA-03 black 9" ABS stake, tapped 1/2" NPS

FINISH: Aluminum - Black texture polyester powder coat. Optional finishes available
Brass - Unfinished brass. Optional finishes available

NOTE: Optional 120v to 277v drivers available. Must use FA-26 mounting post or junction box

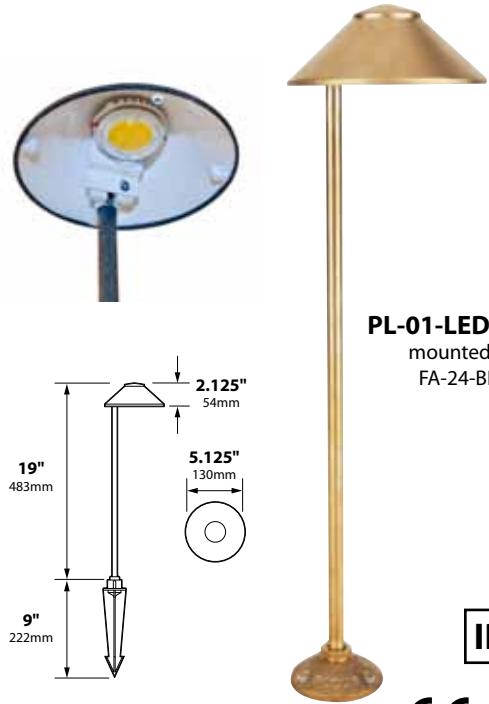

PL-01-LEDP-BRS
mounted on
FA-24-BRS

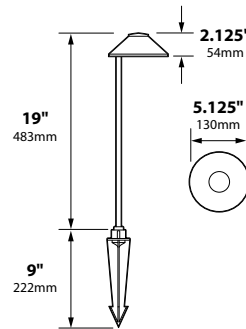

IP54



ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
PL-01LEDP-BLT	Cast Aluminum 5.5" China Hat	4w Round LED Panel	2.0 lbs.
PL-01LEDP-BRS	Cast Brass 5.5" China Hat	4w Round LED Panel	3.0 lbs.

MOUNTING ACCESSORIES

FA-03-RX/-BRS: 7.00" 178mm, 2" 51mm

FA-03-LG: 9.00" 229mm, 3" 76mm

FA-24-BRS: 0.9" 23mm, 3" 76mm

FA-22-CST/-BRS, FA-22/-BRS: 3.5" 89mm, 1.125" 28mm, 5.75" 146mm

FA-24-MD-CST/-BRS: 2.65" 67mm, 1.4" 36mm

FA-24-LG-CST /-BRS, FA-24-LG-SPUN /-BRS: 4.75" 121mm, 0.875" 22mm

FA-24-MD-CST-PC/-BRS: 2.65" 67mm, 1.4" 36mm

FA-01-BRS: 15" 381mm, 1.63" 41mm

FA-24-MD-CST-POST/-BRS: 13" 330mm, 2.65" 67mm

FA-24-MD-CST-POST2/-BRS (telescopic): 16" 406mm, Telescopic to 26"


C/FA-25/-26/BRS: 20" 508mm, 3" 76mm

FA-30-4: 4" 102mm

FA-30-8: 8" 203mm

STEM EXTENSIONS: FA-30 FA-31 FA-32 FA-33 FA-34 -BRS = Brass Models (Arrow: couplers)

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

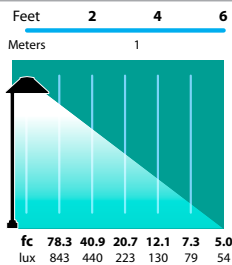

PL-01

Half Spread Photometrics
12 ft. (3.7 m) diameter

JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat. No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT