

# JOSHUA TREE

G4 Path Light



## DESCRIPTION


The Joshua Tree Path Light comes complete with one or two G4 Rectangular Wafer sockets. This modern fixture is a downward facing path light perfect for path, area, and garden accent lighting.

### JOSHUA TREE PATH LIGHT

Use	<b>Path, Area, and Garden Accent Lighting</b>		
Finish	<b>Aluminum w/ Black Cerakote®</b>		
Includes	<b>ABS Mounting Stake, LightingShrink Professional Crimp, and Heat Shrink Cable Connector</b>		
Order With Lamp	<b>G4 Rectangular Wafer</b>	<b>1 socket, 2700K, 120 Lumens</b>	JOSHUA-PL-20-G4-1-AL-BLK
		<b>2 sockets, 2700K, 240 Lumens</b>	JOSHUA-PL-20-G4-2-AL-BLK
Order Without Lamp	<b>Fits G4 Bi-Pin</b>	<b>1 socket</b>	JOSHUA-PL-20-G4-1-AL-BLK-NL
		<b>2 sockets</b>	JOSHUA-PL-20-G4-2-AL-BLK-NL



Aluminum +Black  
Cerakote® (AL-BLK)

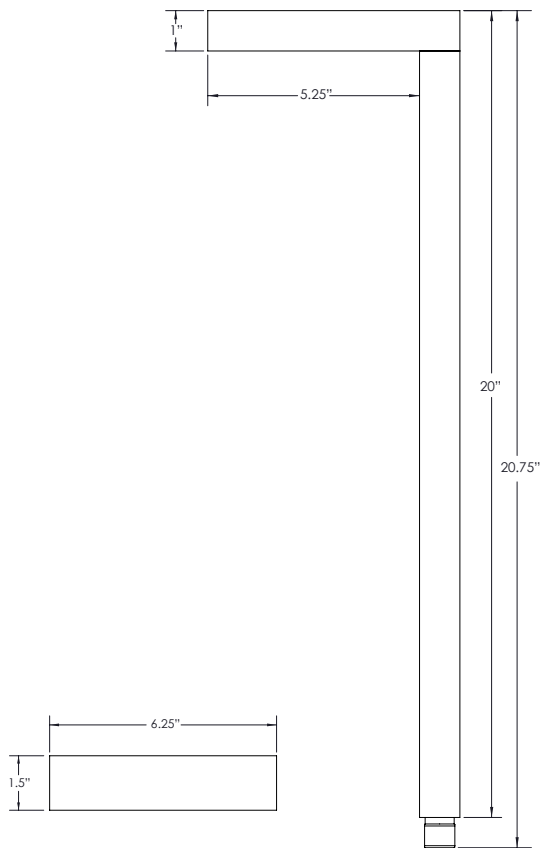



**JOSHUA-PL-20-G4-2-AL-BLK**

**SOFT SOIL APPLICATIONS: INSTALLING THE GROUND STAKE & FIXTURE**

1. Connect the power cable from the fixture body to the landscape cable.
2. Lay the power cable into the slotted relief on the stake.
3. Press the fixture and stake into the ground.
4. Use a level to ensure the top of the stake is level with the ground.

**HARD SOIL APPLICATIONS: INSTALLING THE GROUND STAKE & FIXTURE**

1. Unscrew the fixture body from the stake.
2. Dig a hole approximately 4" wide by 10" deep and gently tap the stake into the ground with a rubber mallet.
3. Use a level to ensure the top of the stake is level with the ground.
4. Reinstall the fixture body onto the stake and lay the power cable into the slotted relief on the stake.
5. Connect the power cable from the fixture body to the landscape cable.

**INSTALLING THE LAMP**

1. Loosen the screw for the lens cover.
2. Install the G4 Wafer into the socket.
3. Place the lens cover back on the fixture body.
4. Tighten the screw for the lens cover.